

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 January 2002 (03.01.2002)

PCT

(10) International Publication Number
WO 02/01775 A1

(51) International Patent Classification⁷: **H04J 3/06**

SCHETELIG, Markus; Imbuschstrasse 54, 45731 Wal-
trop (DE).

(21) International Application Number: **PCT/EP01/06675**

(74) Agents: **HIGGIN, Paul** et al.; Nokia House, Summit Av-
enue, Farnborough, Hampshire GU14 ONG (GB).

(22) International Filing Date: **13 June 2001 (13.06.2001)**

(25) Filing Language: **English**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility
model), DK, DK (utility model), DM, DZ, EE, EE (utility
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK
(utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZW.

(26) Publication Language: **English**

(30) Priority Data:
0015721.4 **27 June 2000 (27.06.2000)** **GB**


(71) Applicant: **NOKIA MOBILE PHONES LIMITED**
[FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors: **MULLER, Thomas**; Laerstrasse 50, 44803
Bochum (DE). **JOERESSEN, Olaf**; Geibelstrasse
30, 40235 Düsseldorf (DE). **SCHNITZLER, Jur-
gen**; Hugo-Schultz-Strasse 39, 44789 Bochum (DE).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: **MASTER/SLAVE SYNCHRONISATION METHOD IN A BLUETOOTH SYSTEM**

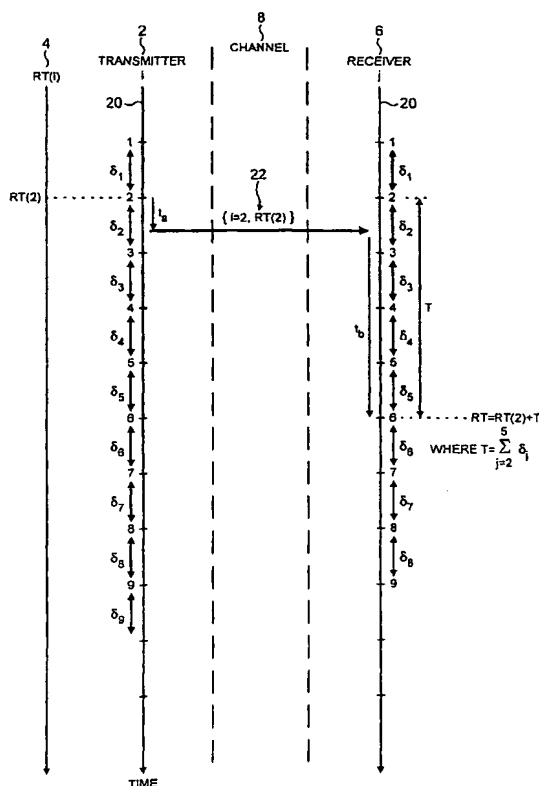

(57) Abstract: A transceiver for operating in a network wherein the transceiver is arranged to synchronise to a time reference common to the network having distinguishable instances comprising: means for reading or writing a real time clock at an identified instance of the common time reference; means for transmitting an identification of the real time clock value of a first instance and an identification of the first instance; and additionally comprising means for receiving a transmitted identification of a real time clock value and an identification of a first instance.

WO 02/01775 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

MASTER/SLAVE SYNCHRONISATION METHOD IN A BLUETOOTH SYSTEM

The present invention relates to the synchronisation of Real Time clocks of
5 separate devices. It has particular application for devices communicating
according to the Bluetooth Standard.

In an increasingly multimedia world, it is important to be able to control the
timing of multimedia output so that each of the outputs have the correct timing
10 relative to other events and outputs. If the correct timing is achieved each
output will be in real time and will be correctly synchronised with the other
outputs.

If the outputs are distributed in space, however, it may be difficult to establish
15 and maintain synchronicity between the real time clocks associated with each
output. This problem is particularly acute when the latencies between the
different outputs are unknown or variable.

This problem applies equally to multimedia inputs and maintaining the
20 synchronism between them.

An exemplary scenario in which the problem comes to the fore is in a
surround sound video application in which multiple audio outputs are
synchronised to the video output. During recording and playback the different
25 media streams (audio and video) need to be adjusted with respect to a certain
time reference.

It would be desirable to address the above mentioned problem of
synchronisation.

30

According to one aspect of the present invention there is provided a
transmitter for transmitting in a network comprising the transmitter and at

least one receiver wherein the transmitter is arranged to synchronise to a common time reference having distinguishable instances, comprising: means for reading a real time clock at an identified instance of the common time reference; and means for transmitting an identification of the real time clock value for a first instance and an identification of the first instance.

The first instance may be in the past or may be in the future at the moment of transmission. The transmitter may calculate the real time clock value at the first instance by adding the time difference between the first instance and the identified instance to the real time clock value at the identified instance to obtain the real time clock value for the first instance. However, the first instance and the identified instance may be one and the same, in which case such calculation is unnecessary.

According to another aspect of the invention there is provided a receiver for receiving in a network comprising at least the receiver and a transmitter wherein the receiver is arranged to synchronise to a common time reference having distinguishable instances comprising: means for receiving a transmitted identification of a real time clock value and an identification of a first instance; and means for determining a real time clock value, current at a second instance from the received identification of a real time clock value and the received identification of a first instance.

The real time clock value is the received value, if necessary, corrected in accordance with the time difference between the first and second instances.

The first instance may be in the past at the moment of reception. The real time clock value determination may be by calculation in which the time difference between the second and first instances is added to the received value of the real time clock.

The first instance may be in the future at the moment of reception. The means for determining may determine that the current real time clock value is the received value when the second instance of the common time reference occurs, the second and first instances being one and the same.

5

The transmitter may be a part of a transceiver and the receiver may be a part of a transceiver.

The transmitter and receiver may together form a transceiver.

- 10 According to other aspects of the invention there are provided transceivers as claimed in claims 36, 37, 38 and 39.

According to a further aspect of the present invention there is provided methods as claimed in claims 41 and 42.

15

According to a still further aspect of the present invention there is provided a network as claimed in claim 43--.

- 20 The problem addressed may be exacerbated when the inputs or outputs are not physically connected but communicate wirelessly. The limitations on available bandwidth may cause problems in real time communication.

- 25 According to a preferred embodiment of the present invention the wireless communication is provided in accordance with the Bluetooth Standard, adapted to incorporate the present invention. In this preferred embodiment existing aspects of the existing Bluetooth system are ingeniously re-used. In particular the Link Level Synchronisation which is used for the timing of Fast Frequency Hopping is used as the common time reference of the present invention. This advantageously provides Real Time synchronism between
30 devices in the range of a few microseconds. Furthermore, Link Level Messages may be used to communicate the necessary identifications of the real time value and the first instance.

In embodiments of the invention, the synchronous instances of the common time reference are such that when there is an instance in one device there is an identifiably corresponding instance in an other device. Preferably the instances are separated by a fixed time period or an integral number of fixed
5 time periods.

For a better understanding of the present invention and to understand how the same may be brought into effect reference will now be made by way of example only to the following drawings in which:

10

Figure 1 is a schematic illustration of a transmitter and a receiver each of which performs aspects of the present invention;

15

Figure 2 is a schematic illustration of the common time reference, the communication between transmitter and receiver and the calculations performed at the receiver according to a first embodiment of the invention;

20

Figure 3 is a schematic illustration of the common time reference, the calculation performed in the transmitter and the communication between the transmitter and receiver according to a second embodiment of the invention;

Figure 4 illustrates a Bluetooth communications network;

25

Figure 5 illustrates the time frame of the communications network;

Figure 6 illustrates a radio packet;

Figure 7 illustrates a transceiver unit suitable for use as a master or slave;

30

Figure 8 illustrates the correspondence between common time reference and the Bluetooth clock .

Referring to Figure 1, there is illustrated a transmitter device 2 having access 3 to a Real Time (RT) Clock 4, and a receiver device 6. The transmitter 2 communicates with the receiver via a communication channel 8, which may for example be a radio channel. The receiver may have access 7 to a RT
5 Clock 10.

The transmitter is able to provide information to the receiver via channel 8 that allows the receiver 6 at some future time to have a RT value which is synchronous with the value of the RT Clock 4. The receiver may update RT
10 clock 10 accordingly.

The transmitter 2 and receiver 6 share a common time reference. The time reference is typically a clock which produces a plurality of beats or instances, such as a rising (or falling) voltage, each of which is separated by a time
15 interval. The common time reference 20 is illustrated in Figures 2 and 3. The RT clock 4 and common time reference 20 of the transmitter are illustrated to the left of the figures, the common time reference 20 of the receiver is illustrated to the right of the Figures and the channel 8 is illustrated in the middle of the Figures. The arrow of time extends down the page. The
20 common time reference 20 in the transmitter illustratively uses an index i $\{i= 1, 2, 3...\}$ to represent the successive instances of the common time reference. The common time reference 20 in the receiver illustratively uses an index j $\{j= 1, 2, 3...\}$ to represent the successive instances of the common time reference. It should be noticed that the instances i of the transmitter and the
25 instances j of the receiver are synchronous because when an instance i occurs in the transmitter an instance j simultaneously occurs in the receiver.

The interval between instance i and instance $i+1$, δ_i , and the interval between instance j and instance $j+1$, δ_j , are the same when instance i and j
30 are synchronous for all i and j . The intervals may be the same duration irrespective of i and j or the interval δ_i may differ from the interval δ_{i+1} .

Not only are there synchronous instances in the transmitter and receiver, but a particular instance i in the transmitter will be synchronous with a particular instance j in the receiver. Therefore an instance in the transmitter can be identified by a value for i of x and a corresponding synchronous instance j in the transmitter can be identified as the instance when $j=x$. The instances of the common time reference which occur in the transmitter are therefore distinguishable, in this example by the index i . The instances of the common time reference which occur in the receiver are therefore distinguishable, in this example by the index j .

10

The operation of the transmitter and receiver according to a first embodiment will now be explained with reference to Figure 2. At an instance $i=2$, the transmitter 2 reads the current settings $RT(2)$ of the RT clock 4. At a later time (latency of t_a) the transmitter sends a message 22 to the receiver. The message indicates the instant $i=2$ when the RT clock was read and indicates the read value $RT(2)$ of the RT clock. The receiver 6 receives the message 22 and identifies the value $RT(2)$ and the value $i=2$. The receiver, synchronous with an instance $j=6$ of the common time frame, determines the current Real Time Clock value RT . There is a latency of t_b between the receipt of the message 22 and the determination of the current Real Time Clock value RT . The receiver calculates the time difference T between the instance at which $RT(2)$ was read ($i=j=2$) and the current instance ($j=6$) and adds it to the received value of the Real Time clock ($RT(2)$). To calculate T , the receiver identifies the prior instance of the common time reference in the receiver which corresponds to the identified instance $i=2$ of the common time frame of the transmitter. The receiver sums the known interceding interval(s) to calculate T .

25

The operation of the transmitter and receiver according to a second embodiment will now be explained with reference to Figure 3. At an instant $i=2$, the transmitter 2 reads the current settings $RT(2)$ of the RT clock 4. The transceiver determines what the Real Time value RT' will be at a future

30

instance j' of the common time frame. The transmitter calculates the time difference T between the instance at which $RT(2)$ was read ($i=2$) and the future instance j' and adds it to the value of the Real Time clock ($RT(2)$). To calculate T , the transmitter sums the known interval(s) between $i=2$ and $i=j'$. At
 5 a later time (latency of t_a) the transmitter sends a message 24 to the receiver. The message indicates the instant j' and the value RT' . The receiver 6 receives the message 22 and identifies the value RT' and the value j' . At an instance j of the common time reference of the receiver corresponding to the instance j' , the current Real Time Clock value RT is RT' .

10

The latencies t_a and t_b are generally unknown and variable.

Generalising, let k , l , and m be instances of the common reference 20. At the transmitter, a real time value $RT(k)$ is read at instant k and a message is sent
 15 which identifies an instant l and a real time value $RT(l)$ at that instant, where instant l is synchronous with or after instant k . At the receiver, at an instant m , the current real time value $RT(m)$ is set to $RT(l) + T_{lm}$, where T_{lm} is the interval between instant m and l .

20 The system as described is particularly useful for distributed devices or application which require synchronicity in real time such as multimedia applications. The transmitter 2 may be part of a multimedia input such as a camera or speaker or local distribution point such as a satellite receiver. The receiver 6 may be part of a multimedia output device such as a speaker or
 25 screen.

The transmitter may send audio, video or data to the receiver, together with a Real Time stamp. The transmitter produces an output at the correct time using its own correct Real Time clock and the time stamp. The above
 30 mentioned procedure creates and maintains synchronicity between the Real

Time clock associated with the transmitter 2 and the Real Time clock associated with the receiver 6.

Embodiments of the invention find particular application in transmitters,
5 receivers and transceivers operating in accordance with the Bluetooth specification as described below. The current specification is 1.0B, the contents of which are hereby included by reference.

Figure 4 illustrates a network 102 of radio transceiver units, including a master
10 unit 104 and slave units 106, 108 and 110, communicating by transmitting and receiving radio packets. The master unit is the transceiver unit which initiates the connection of a slave to the network. There is only one master in a network. The network operates in a time division duplex fashion. A single packet is transmitted in the network at a time and the transceiver units are
15 synchronised to a common time frame determined by the master unit 104. This time frame consists of a series of time slots of equal length. Normally, each radio packet transmitted in the network has its start aligned with the start of a slot and adjacent slots are assigned for respectively transmission and reception by the master unit. When the master unit is performing point-to-
20 point communication a transmitted radio packet is addressed to a particular transceiver which replies to the master unit by transmitting a radio packet addressed to the master unit in the next available time slot. When the master unit is performing point to multi-point communication a transmitted radio packet is addressed to all transceiver units. Any time misalignment between
25 the master and a slave is corrected by adjusting the timing of the slave.

The transceivers transmit and receive in a microwave frequency band, typically 2.4 GHz.

30 The network reduces interference by changing the frequency at which each radio packet is transmitted. A number of separate frequency channels are

assigned each with a bandwidth of 1MHz, and the frequency hops at a rate of 1600hops/s. The frequency hopping of the transceivers communicating in or joining the network is synchronised and controlled by the master unit. The sequence of hopping frequencies is unique for the network and is determined by a unique identification of the master unit. Each transceiver unit has a unique identification, the Unit ID, henceforth referred to as the Slave ID for the slave units and the Master ID for a master unit.

The network is a radio frequency network suitable for transmitting voice information or data information between transceivers. The transmissions made are of low power, for example 0 to 20dBm, and the transceiver units can effectively communicate over the range of a few centimetres to a few tens or hundred of metres. The master unit has the burden of identifying the other transceiver units within its transmission range and the burden of paging a transceiver unit to set up a communication link between the master unit and that slave unit. Each of the slave units has a low power mode in which it neither transmits nor receives and other modes in which it receives and then responds to radio packets addressed to it by the master unit. A slave unit may remain in the low power mode except when transmitting or receiving.

Referring to Figure 5, a frame 120 is illustrated. This frame 120 is the common time frame used by the network 102 and controlled by the master unit 104. The frame illustratively has slots 122 to 129. The slots designated by even numbers are normally reserved. Only the master unit can normally begin transmitting a radio packet aligned with the start of the even numbered slots. The slots designated by odd numbers are normally reserved. Only radio packets transmitted by a slave, that is radio packets addressed for reception by the master unit can normally have their start aligned with the start of the odd numbered slots. Each slot is allocated a different one of a sequence of hopping frequencies. A slot has a constant time period and is typically 625 microseconds.

Referring to Figure 6, a typical radio packet 130 is illustrated. The radio packet has a start 132 and contains three distinct portions: a first portion contains an Access Code 134, a second portion contains a Header 136 and a third portion contains a Payload 138.

5

The Access Code is a series of symbols used in the network to identify the start of a radio packet. It has a fixed length. In a normal communication mode, the master and slave units use the Master ID as the Access Code. As there is only one master unit in a network, the Master ID identifies the network.

10

The header 136 may or may not be present. If present, it has a fixed length. The header contains control words. The local address (L_ADDR) is a word uniquely identifying a slave within a network. The local address is assigned to a slave unit by the master unit when the master unit joins the slave to the network. The all zero L_ADDR is reserved for broadcast purposes. The packet identification word (PK_ID) specifies the features of the radio packet 130. PK_ID specifies whether a payload is present and its size and whether the payload contains data or transceiver control information.

15

20 The payload 38 carries either transceiver control information or voice/data information. The payload is of variable length and may be absent.

25

Referring to Figure 7, a schematic illustration of a transceiver unit is shown. Only as many functional blocks and interconnections are shown in this diagram as are necessary to explain in the following how a transceiver unit and the communication network operates. The transceiver unit 140 contains a number of functional elements including: an antenna 146, receiver 150, synchroniser 152, header decoder 154, controller 160, memory 156 having memory portion 158 storing the transceiver unit's Unit ID, packetiser 142, clock 168, frequency hop controller 148 and transmitter 144. Although these elements are shown as separate elements they may in fact be integrated together and may be carried out in software or in hardware.

30

Data to be transmitted in the payload of a packet by the transceiver unit 140 is supplied as data signal 141 to the packetiser 142. Control information to be transmitted in the payload of a packet is supplied in a payload control signal 189 provided by the controller 160 to the packetiser 142. The packetiser 142
5 also receives an access code control signal 169 and a header control signal 171 from controller 160 which respectively control the Access Code 134 and the Header 136 attached to the payload to form the packet. The packetiser 142 places the data or control information into a packet 130 which is supplied as signal 143 to the transmitter 144. The transmitter 144 modulates a carrier
10 wave in dependence upon the signal 143 to produce the transmitted signal 145 supplied to the antenna 146 for transmission. The frequency of the carrier wave is controlled to be one of a sequence of hop frequencies by a transmission frequency control signal 147 supplied by the frequency hop controller 148 to the transmitter 144.

15

The antenna 146 receives a radio signal 151 and supplies it to the receiver 150 which demodulates the radio signal 151 under the control of a reception frequency control signal 149 supplied by the frequency hopping controller 148 to produce a digital signal 153. The digital signal 153 is supplied to the
20 synchroniser 152 which synchronises the transceiver unit 40 to the time frame of the network. The synchroniser is supplied with an access code signal 181 specifying the Access Code of the packet which the transceiver unit is expecting to receive. The synchroniser accepts those received radio packets with Access Codes which correspond to the expected Access Codes and
25 rejects those received radio packets with Access Codes that do not correspond to the expected Access Code. A sliding correlation is used to identify the presence and the start of the expected Access Code in a radio packet. If the radio packet is accepted then the radio packet is supplied to the header decoder 154 as signal 155 and a confirmation signal 179 is returned
30 to the controller 160 indicating that the packet has been accepted by the synchroniser 152. The confirmation signal 179 is used by the controller in a slave unit to resynchronise the slave clock to the master clock. The controller

compares the time at which a radio packet was received with the time at which the radio packet was expected to be received and shifts its timing to offset the difference. Such an offset may be achieved by varying the value of M_OFFSET stored in memory 156 by the value of the difference. The header decoder 154 decodes the header in the received packet and supplies it to the controller 160 as header signal 175. The header decoder 54, when enabled by a payload acceptance signal 177 supplied by the controller 160, produces a data output signal 157 containing the remainder of the radio packet, the payload 138. The controller responds to a zero value of L_ADDR in the header signal 175 to enable the header decoder. The data output signal 157 may contain transceiver control information. In this instance the data output signal 157 is supplied to controller 160 in response to the payload acceptance signal 177 provided by the controller 160.

15 The frequency-hopping controller 148 cycles through a sequence of frequencies. The transmission frequency control signal 147 and the reception frequency control signal 149 normally alternately control the transmitter 144 and the receiver 150. When the transceiver 140 is acting as a master, the receiver 150 is normally capable of receiving at frequencies determined by the odd values of the sequence and the transmitter is normally capable of transmitting at frequencies determined by the even values of the sequence. When the transceiver is acting as a slave unit the reverse is true. The frequency-hopping controller 148 receives the access code control signal 169 (also supplied to the packetiser 142) and an offset signal 167 from the controller 160 and a clock signal 159, which represents the time held in clock 168, from the clock 168. The offset signal 167 defines the value of an offset from the time held in the clock 168. This value may be null. The frequency-hopping controller combines the clock signal 159 and the offset signal 167 to emulate the time held in a clock offset by the value of the offset signal 167 from the clock 168. The sequence of frequencies through which the hopping controller 148 cycles is dependent upon the access code control signal 169. The position within the cycle is dependent upon the emulated time. When the

access code control signal 169 provides the value MASTER ID a master unit frequency-hopping sequence is defined. When the access code control signal 169 provides the value SLAVE ID a slave unit frequency-hopping sequence is defined.

5

The memory 156 has a portion 158 which permanently stores the Unit ID of the transceiver unit 140. The remaining portion of the memory 156 can be written to by the controller 160. If the transceiver unit 140 is functioning as a slave unit, the memory 156 will additionally store the Master ID, a value
10 M_OFFSET representing the difference between the slave unit's clock and the master unit's clock and the slave's address in the network, L_ADDR. If the transceiver unit 140 is functioning as a master unit, the memory 156 will additionally store for each slave unit participating in the network: the Slave ID; a value S_OFFSET representing the difference between the master unit's
15 clock and that particular slave unit's clock and L_ADDR uniquely identifying the particular slave unit in the network.

It should be noted that the access code signal 181, the access code control signal 169 and the offset signal 167 in the communication mode remain the
20 same for adjacent duplex time slots, and that the access code signal 81 and the access code control signal 169 will have the same values.

It will therefore be appreciated that when a master unit and Slave unit are in normal communication, the Slave unit emulates the Master unit's clock by
25 combining the stored current value of M_OFFSET with the value of its own clock. The Master clock and emulated Master clock may both be referred to as the Bluetooth clock. The Bluetooth clock provides a synchronous time reference which is common to the Slave unit and Master Unit. The Bluetooth clock has no relation to the time of day and can be initialised at any value. It is
30 used to provide the timing reference for the Bluetooth transceiver. The Bluetooth clock may be implemented as a free-running 28-bit counter that wraps around at $2^{28} - 1$ at a regular rate of 3.2kHz. The Bluetooth clock in

normal communication is synchronous with the Master clock and is used to keep the Fast Frequency Hopping of the transceivers in the network in step.

Thus far, the transceiver described is known (see WO 00/18149, published
5 29th March 00).

The controller 160 has access 192 to a Real Time Clock 190. The Real Time Clock may be part of a separate application, in which case access 192 represents an interface between the application and the transceiver circuitry
10 140.

The common time reference 20 previously described with reference to Figures 2 and 3 is based upon the Bluetooth clock. The Bluetooth clock which is an existing accurate synchronised clock already used for FFH is reused as the
15 common time reference 20. The Bluetooth clock is a synchronised clock which is shared amongst the devices participating a piconet. In the master unit the Bluetooth clock is the unit's clock, whereas for each Slave unit, the Bluetooth clock is the unit's clock offset by a particular amount.

20 The synchronisation between the Bluetooth clocks is maintained by the synchroniser 152 to a bit level accuracy (1 microsecond). The synchroniser accepts those received radio packets with Access Codes which correspond to the expected Access Codes and rejects those received radio packets with Access Codes that do not correspond to the expected Access Code. A sliding
25 correlation is used to identify the presence and the start of the expected Access Code in a radio packet. and resynchronise or maintain synchronisation of the slave clock to the master clock. This maintains the common Bluetooth clock.

30 An instance in the Bluetooth clock reference, can be defined by the frame or slot number n and a trigger instant within a frame or slot. The frame number is specified by 26 bits and the slot number is specified by 27 bits. The trigger

instant allows the precise timing of the instance to be identified and the frame/slot number allows the more general timing of the instance to be identified, that is, it allows one trigger instant to be differentiated from other trigger instants. The trigger instant, can be pre-set as some fixed point within
5 a slot/frame, in which case the frame/slot number n is sufficient to identify the instance and differentiate it from other instances. The preferred point for the trigger instant within the slot/frame is at the very beginning as illustrated in Figure 8. The trigger instant may alternatively be one of many points within the slot/frame, in which case the frame/slot number is insufficient to identify
10 and differentiate the instance. A trigger flag is also necessary to identify which of the many points within the slot/frame is to be used as a trigger. Consequently, if the trigger instant is pre-set, the index i or j' in the messages 22 and 24 respectively can be the appropriate slot/frame number. However, if the trigger instant is not pre-set, the index i or j' in the messages 22 and 24
15 respectively can be the combination of appropriate slot/frame number and trigger flag.

The messages 22 and 24 may be transmitted as a new form of Link Manager messages. Conventional Link Manager Messages are described in the
20 Bluetooth specification and they are a particular form of transceiver control messages described above in relation to Figure 7. According to the first embodiment described above, the payload of the Link Manager Message would contain $\{ i, RT(i) \}$, that is an indication of a past Real Time value and an indication of the past instance at which it was valid. According to the
25 second embodiment described above, the payload of the Link Manager Message would contain $\{ j', RT(j') \}$, that is an indication of a future Real Time value and an indication of the future instance at which it will be valid.

The Real Time value transmitted in message 22 or 24 may have many
30 different formats. If the format is predetermined or fixed no indication of the format type is needed. However, if the format may vary, a format flag may also need to be included within the message to identify the format of the Real

Time value sent. One possible format for the Real Time value is the Network Time Protocol format referenced in the RTP/RTCP specification (RFC 1889).

5 The controller 160 is arranged to read and/or write to the RT clock 190 and it is provided with the clock signal 159 and the offset value which are added to make the Bluetooth clock.

10 The intervals of the Bluetooth clock are predetermined and fixed. The interval between the beginning of adjacent slots is $625\ \mu\text{s}$ and the interval between the beginning of adjacent frames is 1.25ms. An instance for the Bluetooth clock is preferably at the beginning of each frame.

15 When operating as a transmitter in accordance with the first embodiment, the controller 160 at an instance i in the Bluetooth clock reads the Real Time clock 190 and then controls the packetiser 42 to produce the message 22. The message 22 will have as its Access Code 134 the Master ID, a header 136 indicates that the packet contains transceiver control information and may identify the message as a particular type of Link Manager Message and the payload contains an indication of a past Real Time value and an indication of
20 the past instance at which it was valid.

25 When operating as a transmitter in accordance with the second embodiment, the controller 160 at an instance i in the Bluetooth clock reads the Real Time clock 190. It then calculates the interval T between instance i and j' and controls the packetiser 42 to produce the message 22. The message 22 will have as its Access Code 134 the Master ID, a header 136 indicates that the packet contains transceiver control information and may identify the message as a particular type of Link Manager Message and the payload contains an indication of a future Real Time value and an indication of the future instance
30 at which it will be valid.

When operating as a receiver in accordance with the first embodiment, the header decoder 154 provides the payload of the message 22 to the controller. The controller obtains the indication of the past instance i and the indication of past Real Time value $RT(i)$. The controller then calculates the interval T between the past instance i and a future instance j , and determines the expected Real Time value RT at instance j . At the instance j the expected Real Time value becomes the current Real Time value RT and may be written to RT clock 190.

10 When operating as a receiver in accordance with the second embodiment, the header decoder 154 provides the payload of the message 22 to the controller. The controller obtains the indication of the future instance j' and the indication of the future Real Time value RT' . At the instance j' the received Real Time value RT' becomes the current Real Time value RT and may be written to RT clock 190.

The invention when implemented in Bluetooth devices reuses the existing Link Level Synchronisation used for FFH. The transmission and reception of messages occur at instances of the Bluetooth clock. The receiver 2 illustrated in Figure 1 may be a Bluetooth Master or Slave which remains active in low power mode. The Real Time clocks 4 and 10 are separate from the Bluetooth chip which has an interface for reading/writing a Real Time clock. The controller 160 is controllable through a command to initiate Real Time synchronisation with another device. The controller may access a Real Time clock synchronously with an instance of the Bluetooth Clock and then asynchronously communicate with other devices to cause them to synchronise to that Real Time clock. Alternatively, the controller of a receiver 6 may send a request message requesting that its local Real Time clock is resynchronised, in which case the controller of transmitter 2 may access a Real Time clock synchronously with an instance of the Bluetooth Clock and then communicate with the receiver 6 to cause it to synchronise to that Real

Time clock. In either case, such communication is preferably in the next available time slot for transmission.

- 5 Although the transmission and reception of messages 22 and 24 have been dealt with separately, it should be appreciated that a transceiver may be able to read a RT clock value and send the messages to provide a Real Time clock value and/or receive the messages to acquire a current Real Time clock value.
- 10 Although first and second embodiments have been presented separately, it is envisioned that a receiver, transmitter or transceiver may operate in accordance with one or both of the embodiments and may be controlled to selectively operate in accordance with a particular embodiment.
- 15 Although the invention has been primarily described with reference to a point to point communication system as shown in Figure 1 it also find application in a point to multi-point communication system where the messages 22, 24 are broadcast

Claims

1. A **transmitter** for transmitting in a network comprising the transmitter and at least one receiver wherein the transmitter is arranged to synchronise to a
5 common time reference having distinguishable instances, comprising:
means for reading a real time clock at an identified instance of the common time reference; and
means for transmitting an identification of the real time clock value for a first instance and an identification of the first instance.
- 10 2. A transmitter as claimed in any preceding claim further comprising means for calculating the real time clock value at the first instance by adding the time difference between the first instance and the identified instance to the real time clock value at the identified instance to obtain the real time clock value
15 for the first instance.
3. A transmitter as claimed in claim 1 or 2 wherein the first instance is in the past at the moment of transmission.
- 20 4. A transmitter as claimed in claim 1 or 2 wherein the first instance is in the future at the moment of transmission.
5. A transmitter as claimed in claim 1, 2 or 3 wherein the identified instance and the first instance are one and the same.
- 25 6. A transmitter as claimed in any preceding claim further comprising a synchronisation controller for maintaining the common time reference.
7. A transmitter as claimed in any preceding claim, arranged to communicate
30 in accordance with the Bluetooth Standard, wherein Link Level synchronisation provides the common time reference.

8. A transmitter as claimed in any preceding claim, arranged to communicate in accordance with the Bluetooth Standard, wherein the identification of the real time clock value and the identification of the first instance are transmitted as a Link Manager Message.

5

9. A transmitter as claimed in any preceding claim, arranged to communicate in accordance with the Bluetooth Standard, wherein the instances of the common time reference are synchronous with the frequency hopping of the network.

10

10. A transmitter as claimed in any preceding claim wherein the first instance is identified by using a frame/slot number.

11. A transmitter as claimed in claim 10 wherein the occurrence of the instance within the identified slot/frame is predetermined.

15

12. A transmitter as claimed in claim 11 wherein occurrence of the instance within the identified slot/frame is determined by the transmission of a message.

20

13. A transmitter as claimed in any preceding claim further comprising an interface for connection to a Real Time Clock or Real Time application.

14. A transmitter as claimed in any preceding claim arranged for asynchronous transmission of the identification of the real clock value and of the identification of the first instance.

25

15. A transmitter substantially as hereinbefore described and/or as shown in the accompanying Figures.

30

16. A media device such as a speaker, microphone, screen, camera or computer comprising a transmitter as claimed in any preceding claim.

17. A **receiver** for receiving in a network comprising at least the receiver and a transmitter wherein the receiver is arranged to synchronise to a common time reference having distinguishable instances comprising:
means for receiving a transmitted identification of a real time clock value and
5 an identification of a first instance;
and means for determining a real time clock value, current at a second instance from the received identification of a real time clock value and the received identification of a first instance.
- 10 18. A receiver as claimed in claim 17, wherein the real time clock value is the received value, if necessary, corrected in accordance with the time difference between the first and second instances.
- 15 19. A receiver as claimed in claim 17 or 18, wherein the first instance is in the past at the moment of reception.
- 20 20. A receiver as claimed in claim 17, 18 or 19, wherein the real time clock value determination is by calculation in which the time difference between the second and first instances is added to the received value of the real time clock.
- 25 21. A receiver as claimed in claim 17 or 18, wherein the first instance is in the future at the moment of reception.
- 30 22. A receiver as claimed in claim 17, 18 or 21, wherein the means for determining determines that the current real time clock value is the received value when the second instance of the common time reference occurs, the second and first instances being one and the same.
23. A receiver as claimed in any one of claims 17 to 22, further comprising a synchronisation controller for maintaining the common time reference.

24. A receiver as claimed in claim 23 wherein the synchronisation controller comprises correlation means for identifying access codes preceding the payload of data packets.

5 25. A receiver as claimed in claim 24 wherein the synchronisation to the common time reference is updated as each packet is received .

26. A receiver as claimed in any one of claims 23 to 25, wherein the synchronisation controller provides bit- level synchronisation of the common
10 time reference.

27. A receiver as claimed in any one of claims 17 to 26, arranged to communicate in accordance with the Bluetooth Standard, wherein Link Level synchronisation provides the common time reference.

15 28. A receiver as claimed in any one of claims 17 to 22, arranged to communicate in accordance with the Bluetooth Standard, wherein the identification of the real time clock value and the identification of the first instance are transmitted as a Link Manager Message.

20 29. A receiver as claimed in any one of claims 17 to 28, arranged to communicate in accordance with the Bluetooth Standard, wherein the first instance is identified by using a frame/slot number.

25 30. A receiver as claimed in claim 29 wherein the occurrence of the instance within the identified slot/frame is predetermined.

31. A receiver as claimed in claim 29 wherein occurrence of the instance within the identified slot/frame is determined by the reception of a message.

30 32. A receiver as claimed in any one of claims 17 to 31, further comprising an interface for connection to a Real Time Clock or Real Time application.

33. A receiver as claimed in any one of claims 17 to 32 arranged for asynchronous transmission of the identification of the real clock value and of the identification of the first instance.
- 5 34. A receiver substantially as hereinbefore described and/or as shown in the accompanying Figures.
35. A media device such as a speaker, microphone, screen, camera or computer comprising a receiver as claimed in any one of claims 17 to 34.
- 10 36. A **transceiver** for operating in a network wherein the transceiver is arranged to synchronise to a time reference common to the network having distinguishable instances comprising:
means for reading a real time clock at an identified local instance of the
15 common time reference; and
means for transmitting an identification of the local real time clock value of a first instance and an identification of the local first instance; and additionally comprising
means for receiving a transmitted identification of a distal real time clock
20 value and an identification of a distal first instance;
and means for determining, a distal real time clock value current at a local second instance of the common time reference.
37. A **transceiver** for operating in a network wherein the transceiver is
25 arranged to synchronise to a time reference common to the network having distinguishable instances comprising:
means for reading a real time clock at an identified local instance of the common time reference; and
means for transmitting an identification of the local real time clock value of a
30 first instance and an identification of the local first instance; and additionally comprising

means for receiving a transmitted identification of a distal real time clock value and an identification of a distal first instance;
and means for determining, a distal real time clock value current at a local second instance by adding the time difference between the received distal first instance and the second local instance to the received distal real time clock value.

38. A **transceiver** for operating in a network wherein the transceiver is arranged to synchronise to a time reference common to the network having distinguishable instances comprising:
means for reading a local real time clock at an identified local instance of the common time reference; and
means for calculating the local real time clock value at a first local instance by adding the time difference between the first local instance and the identified local instance to the local real time clock value at the identified instance to obtain the local real time clock value for the first instance and
means for transmitting an identification of the local real time clock value of a first instance and an identification of the local first instance; and additionally comprising
means for receiving a transmitted identification of a distal real time clock value and an identification of a distal instance;
and means for determining that the current distal real time clock value is the received distal real time clock value when the distal instance of the common time reference occurs locally.

25

39. A **transceiver** for operating in a network wherein the transceiver is arranged to synchronise to a time reference common to the network having distinguishable instances comprising:
means for reading or writing a real time clock at an identified instance of the common time reference;

30

means for transmitting an identification of the real time clock value of a first instance and an identification of the first instance; and additionally comprising means for receiving a transmitted identification of a real time clock value and an identification of a first instance.

5

40. A transceiver substantially as hereinbefore described and/or as shown in the Figures.

41. A **method** of providing real time clock information from a transmitter device to a receiver device
comprising :
synchronising the transmitter device to a time reference having distinguishable instances shared in common with the transmitter and receiver
obtaining a real time clock value at an identified instance of the common time reference and
transmitting an identification of the real time clock value for a first instance and an identification of the first instance.

42. A **method** of receiving real time clock information transmitted from a transmitter device to a receiver device
comprising :
synchronising the receiver device to a time reference having distinguishable instances shared in common with the transmitter and receiver;
receiving a transmitted identification of a real time clock value and an identification of a first instance of the common reference; and
determining a real time clock value current at a second instance of the common time reference, corresponding to the received real time clock value corrected in accordance with the time difference between the first and second instances, if any.

30

43. A **network** comprising a transmitter device and at least one receiver device wherein the transmitter and receiver are synchronised to a common time reference having distinguishable instances such that when an instance is measurable at one device there is simultaneously an identifiably
5 corresponding instance measurable at the other device, the transmitter comprising:
means for reading a real time clock at an identified instance of the common time reference; and
means for transmitting an identification of the real time clock value for a first
10 instance and an identification of the first instance,
and the receiver comprising:
means for receiving the transmitted identification of the real time clock value at the first instance and the identification of the first instance;
and means for determining, at a second instance, a current real time clock
15 value .
44. A network substantially as hereinbefore described and/or as shown in the accompanying Figures.

1 / 6


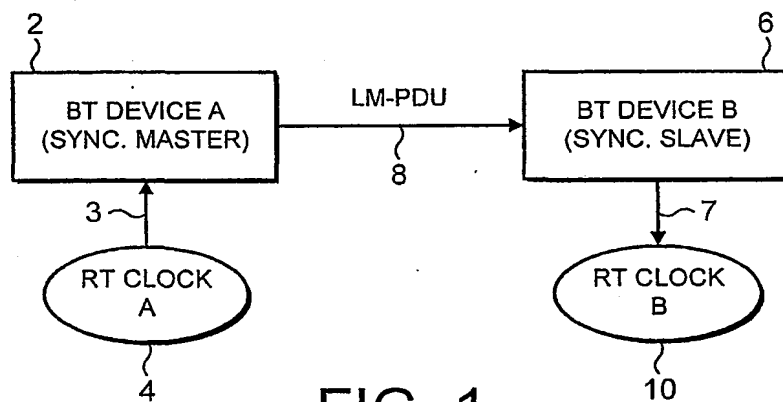


FIG. 1

2 / 6

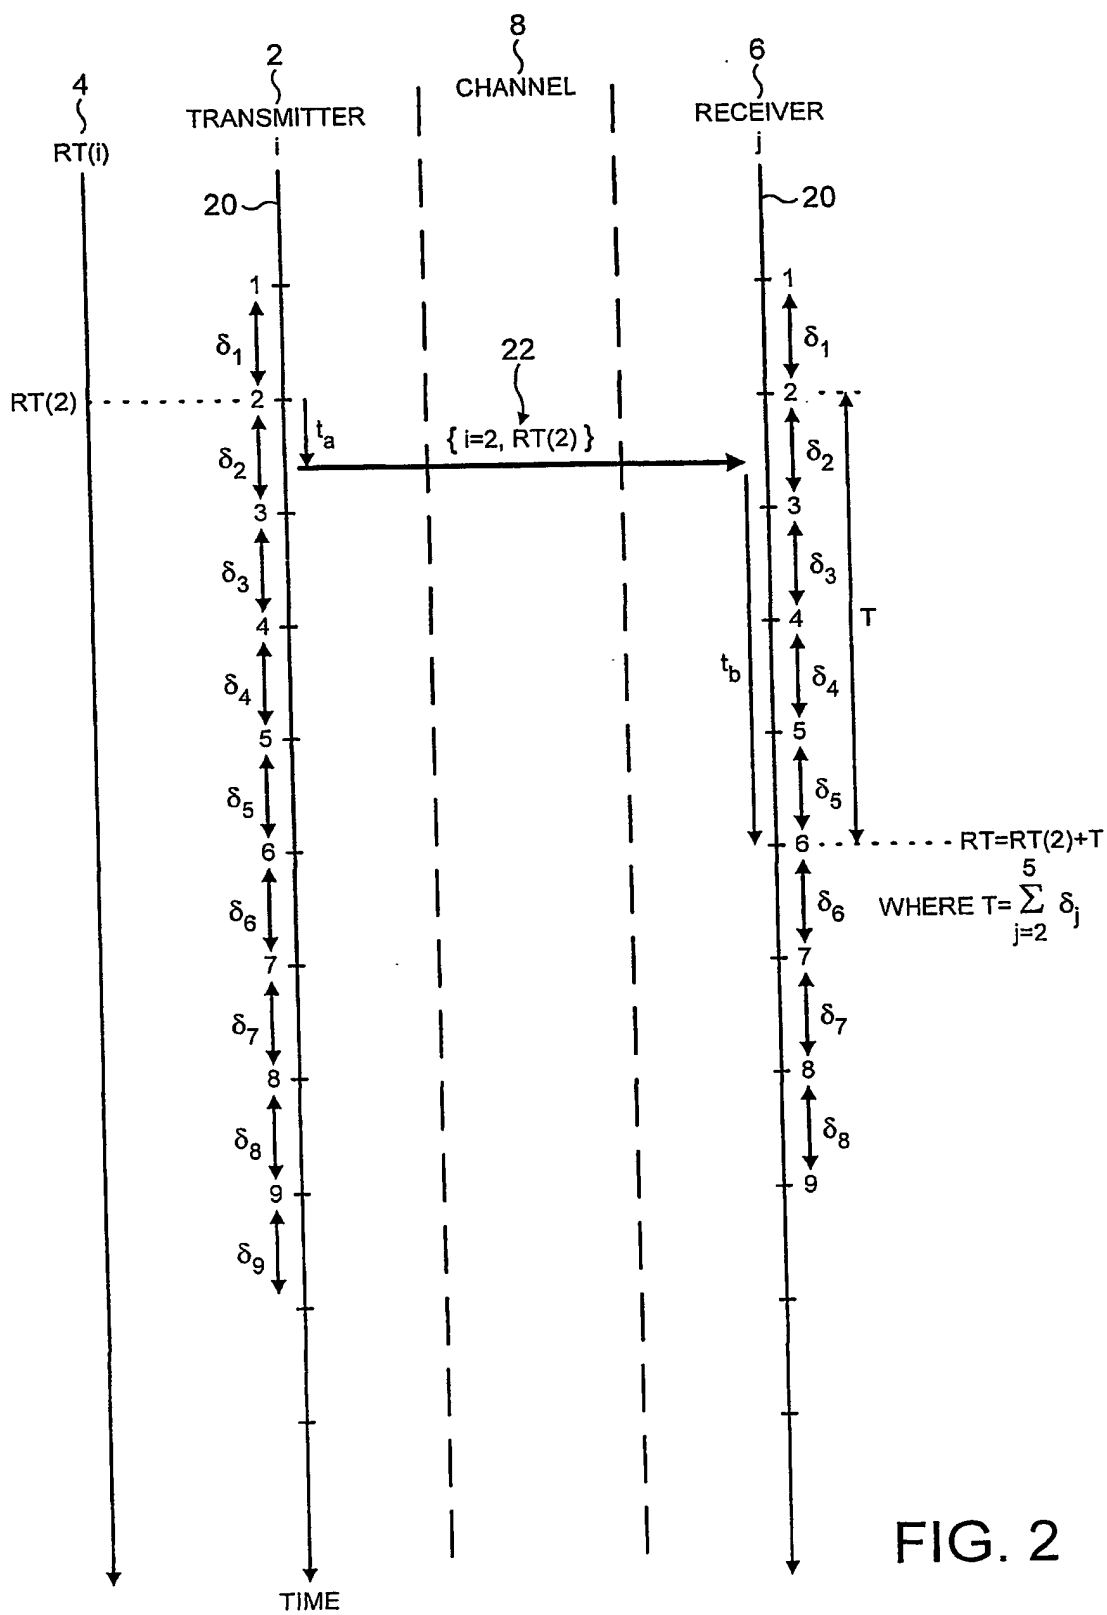

3 / 6

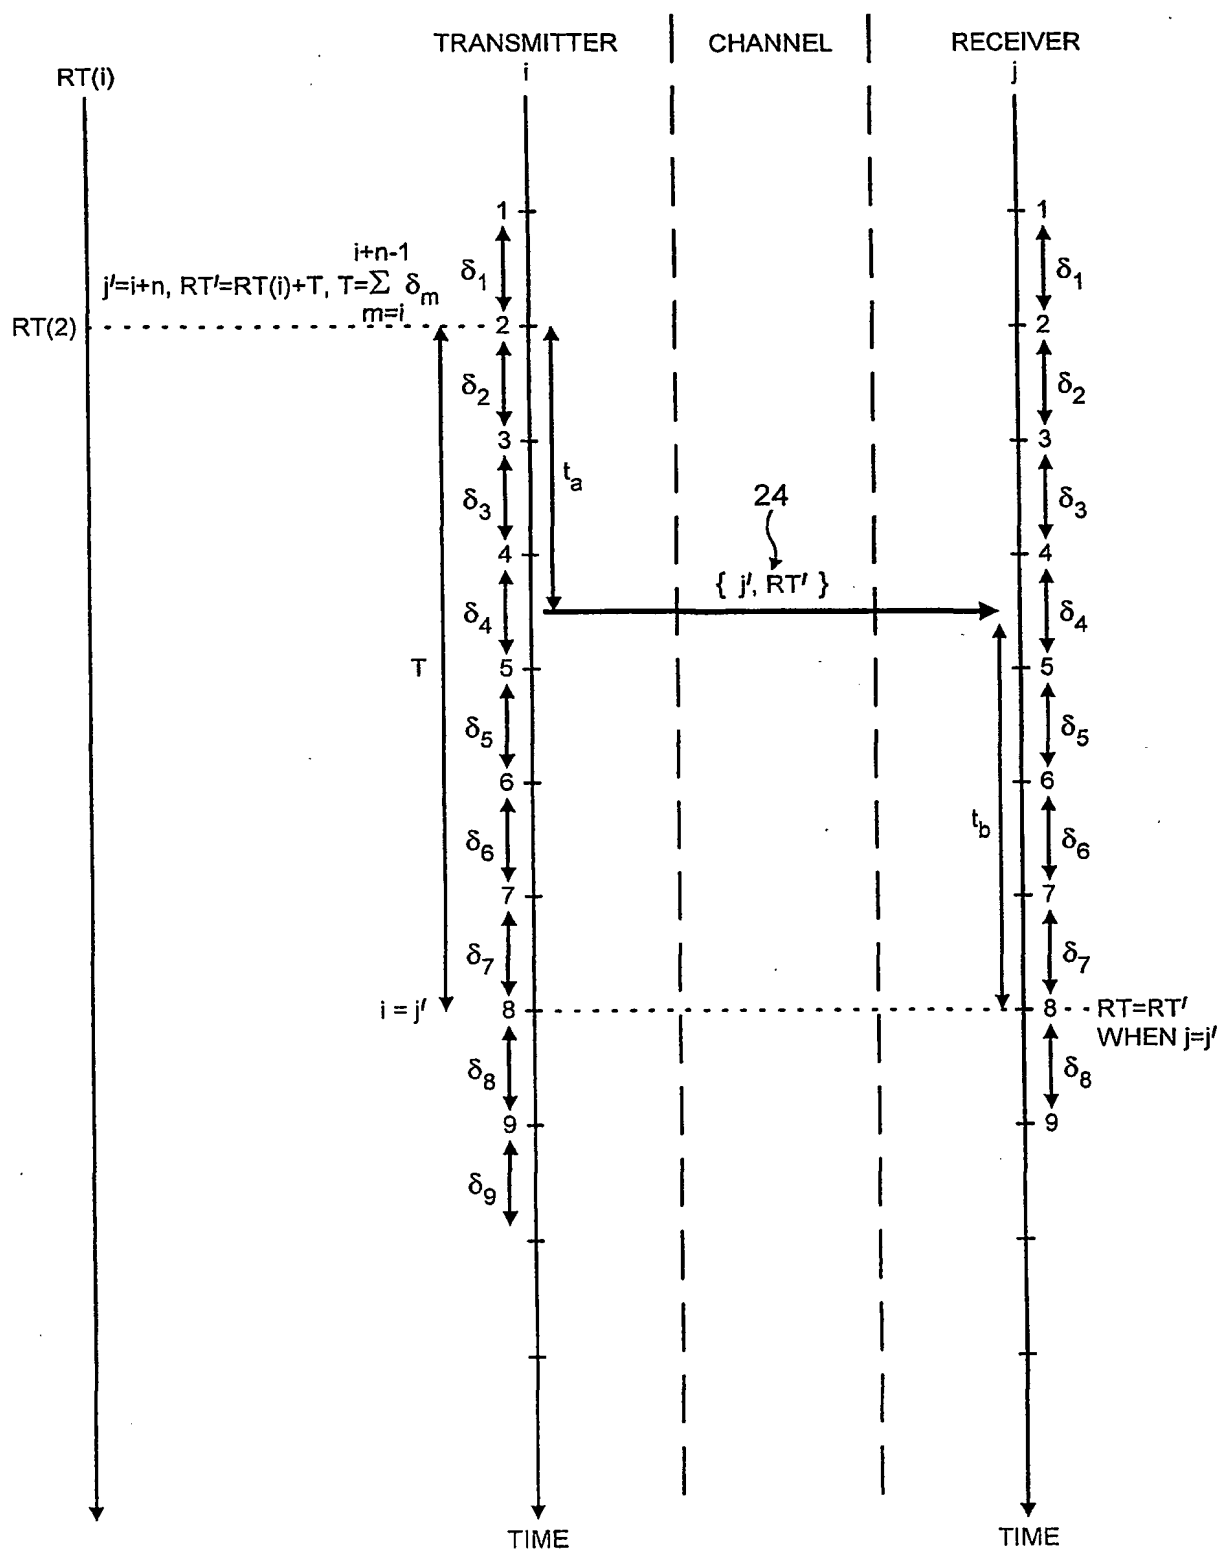


FIG. 3

4 / 6

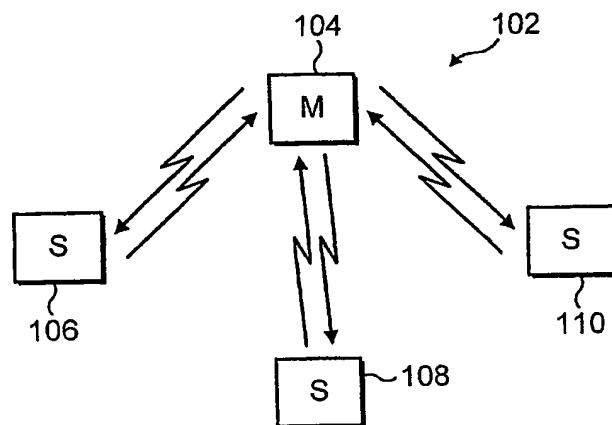


FIG. 4

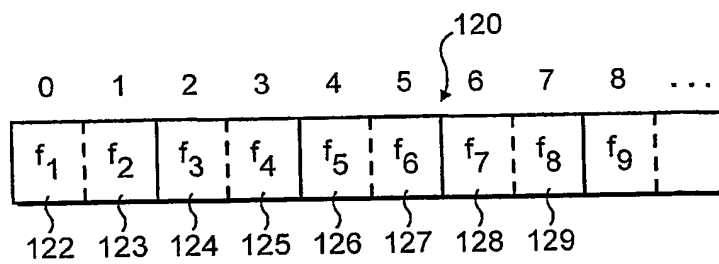


FIG. 5

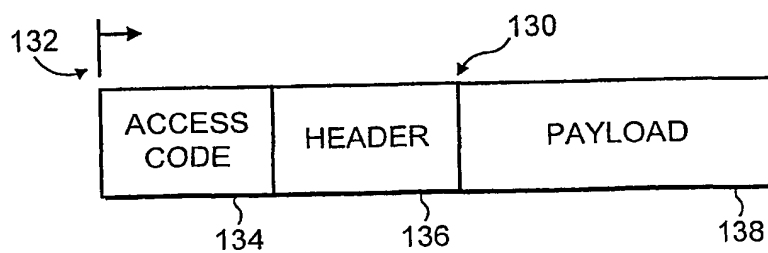


FIG. 6

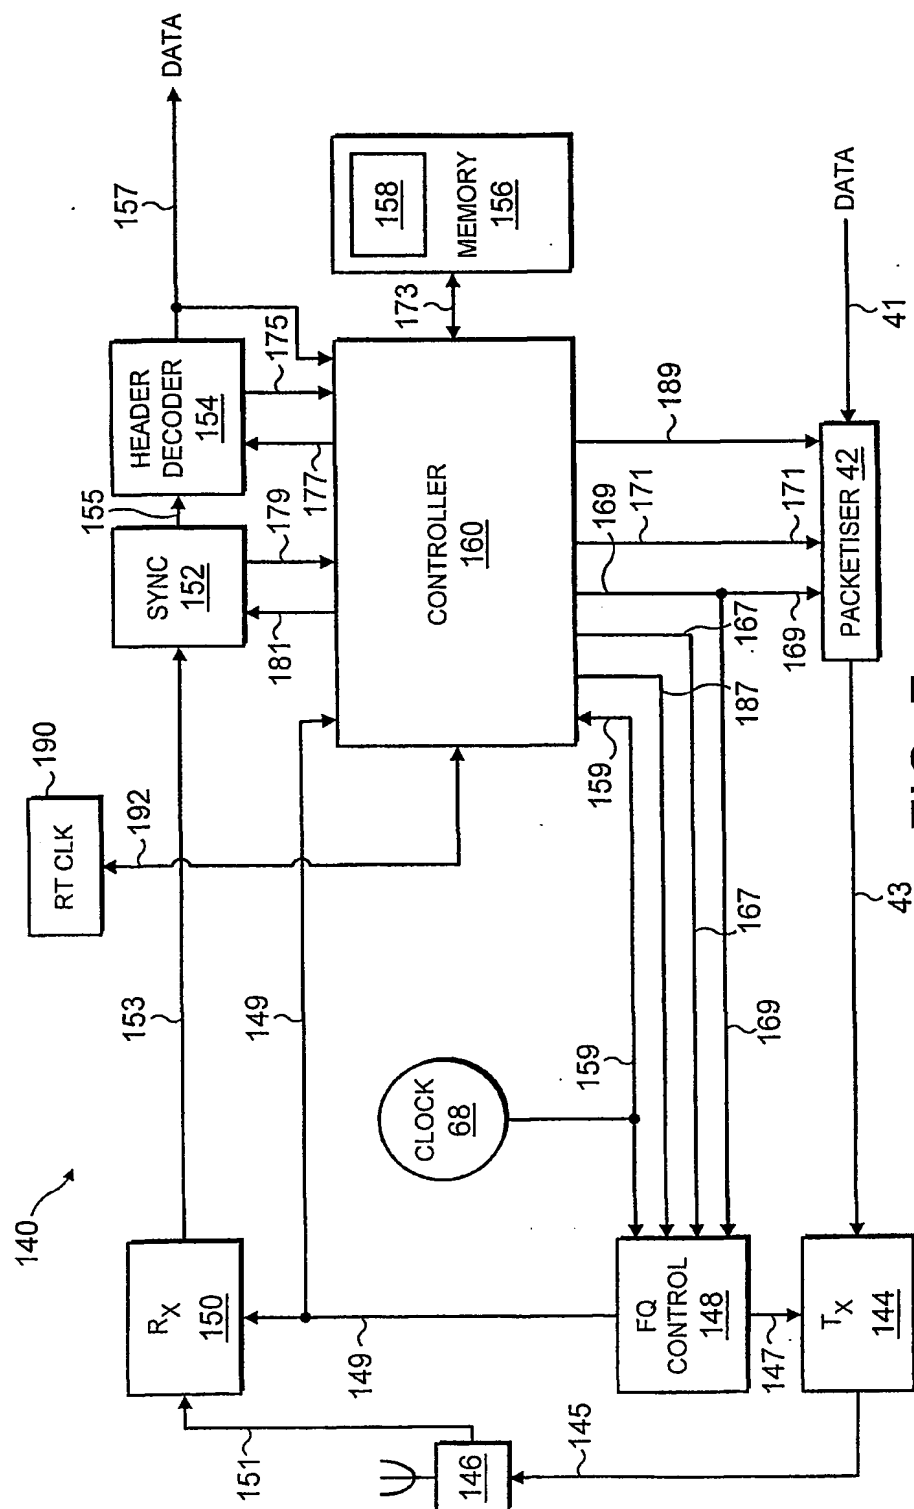


FIG. 7

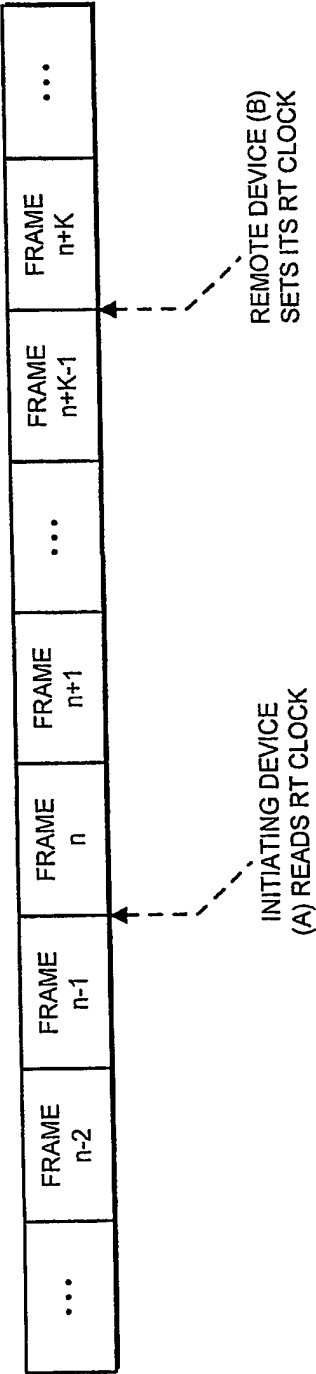


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/06675

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04J3/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04J G06F H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 00 38361 A (ERICSSON TELEFON AB L M) 29 June 2000 (2000-06-29) page 5, line 16 -page 9, line 2 figures 2, 4A	1, 17, 36-39, 41-43
A	US 4 530 091 A (CROCKETT GARY B) 16 July 1985 (1985-07-16) column 9, line 34 -column 10, line 57	1, 17, 36-39, 41-43

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

12 October 2001

Date of mailing of the international search report

18/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Larcinese, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

In tional Application No

PCT/EP 01/06675

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0038361	A	29-06-2000	AU 3093700 A EP 1142176 A2 WO 0038361 A2	12-07-2000 10-10-2001 29-06-2000
US 4530091	A	16-07-1985	CA 1211850 A1 DE 3377817 D1 EP 0148179 A1 WO 8500441 A1	23-09-1986 29-09-1988 17-07-1985 31-01-1985